


# SpecsSure®



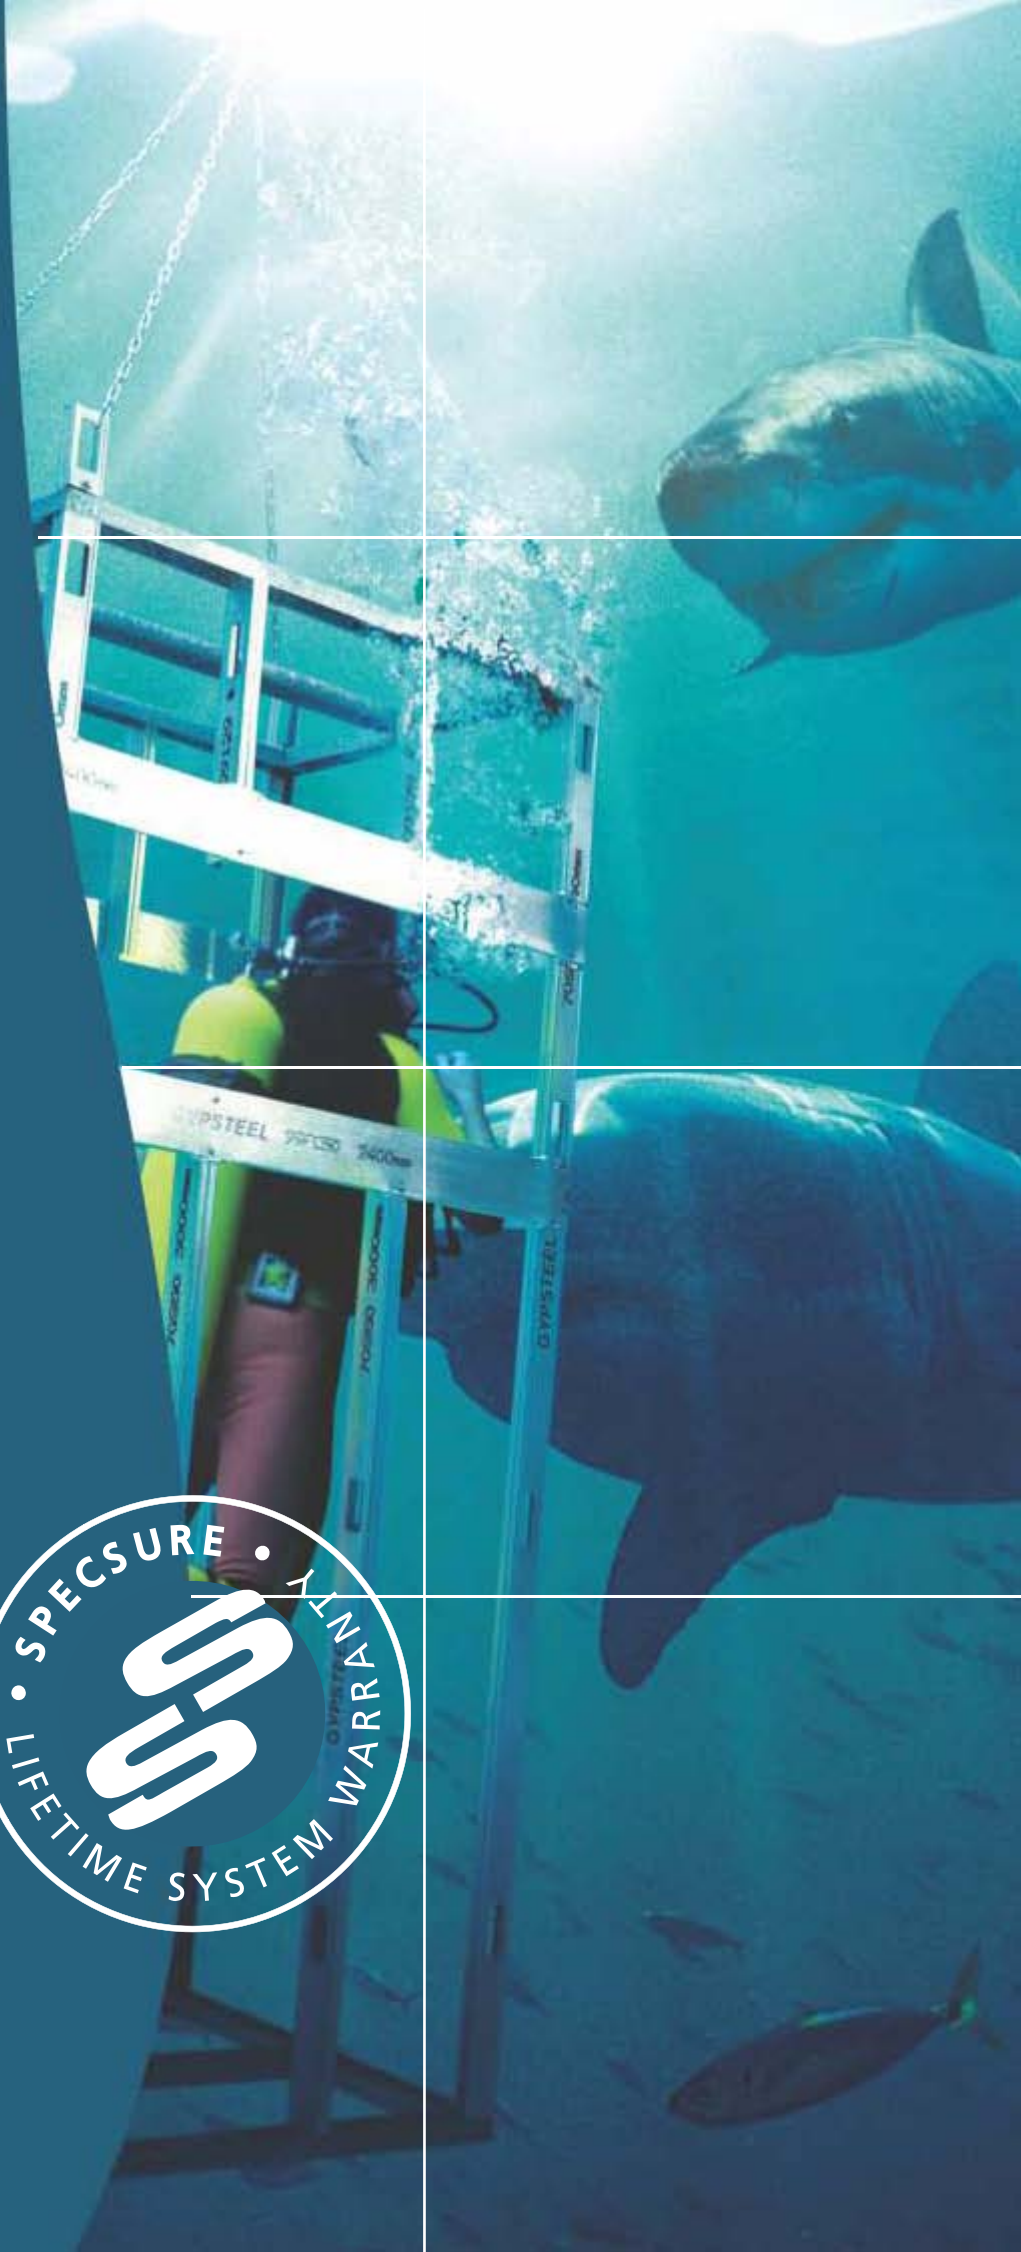

## SpecSure®

SpecSure® is a unique off the shelf warranty to end users that confirms Saint - Gobain Gyproc India Limited proprietary systems will perform to the parameters published in our current literature for the period of time that the system is used for its originally designed purpose

### To qualify for SpecSure®

- Specify and install Saint - Gobain Gyproc India Limited systems in line with the recommendations of the Ceiling and Drywall specification template
- The systems must comprise only genuine branded Saint - Gobain Gyproc India Limited components (Gypboard® plasterboards, Gyproc® performance plasterboards, Gypsteel ULTRA™ metal framing and Gyproc accessories), tried and tested in buildings for more than two decades. We cannot guarantee that the use of other manufacturer's components will meet our quality standards when installed in our tested systems.

## What you get with SpecSure® :

### The best components

All Saint - Gobain Gyproc India Limited systems are precision engineered to provide the right level of performance for your building. They comprise high quality branded components - Gypboard® Plasterboards, Gyproc® performance boards, Gypsteel ULTRA™ metal framing & accessories - developed specifically to work together to provide the widest range of market leading false ceiling and drywall partition solutions in the India. These individual components are manufactured to, and often surpass, all relevant British and Indian standards.

### A range of systems designed for today's buildings

Our systems have been purpose-designed by experienced technicians to meet the challenging needs of today's increasingly demanding buildings. Whether it is straight forward office partitions or sophisticated 4 hour fire rated drywall systems - every aspect is taken into consideration, from performance to speed and ease of installation - and from safe handling to the ready availability of components, anywhere in the India.

### Full technical support

The Saint - Gobain Gyproc India Limited Drywall Academy, with a full team of qualified technical advisors will provide help with every aspect of system design and installation, including:

- Full technical support at the design stage, including specification advice and provision of CAD details if required.
- On-site guidance throughout the installation process via our team of technical site specialists.
- Off-site training of operatives and supervisory personnel at our purpose-built Academy training center of Wada (near Mumbai), Jind (near Delhi, Chennai and Bengaluru)

### The backing of the world leader in gypsum products

Saint - Gobain Gyproc India Limited is the market leader and pioneer in advocating false ceiling and drywall partition systems, with expertise and experience gained during more than two decades of supporting the Indian construction industry. It is a part of Saint-Gobain Gyproc the world leader in plaster and plasterboard systems, whose worldwide operations encompass more than 50 countries.

### Peace of mind guaranteed

SpecSure® warranties your system against the following types of common failure,

- System Integrity & Stability - The system shows visible sag or deflection due to improper design and installation of the false ceiling or drywall partition systems.
- System Failure - The system completely fails to meet its basic design intent (i.e. the false ceiling or drywall partition system breaks down)

\* The SpecSure® certificate is not applicable for jointing & finishing

\*\*The SpecSure® certificate warranty is not applicable if system failure arises due to external conditions like water leakages, earthquakes etc. or following non standard operating practices.

# The SpecSure® certification process

## 6 easy steps



- **Step 1** - Call the Saint - Gobain Gyproc India Limited sales representative and give him all the relevant details of the project including the details of the contractor who is going to execute the project.
- **Step 2** - The Saint - Gobain Gyproc India Limited sales representative will then guide you to procure 100% genuine and authentic products from Saint - Gobain Gyproc India Limited authorized vendors and give you the relevant specifications to be followed for the various systems.
- **Step 3** - The Saint - Gobain Gyproc India Limited sales representative should be informed when the material is procured and transferred to the site in order to ensure that genuine material has been received at site.
- **Step 4** - The Saint - Gobain Gyproc India Limited sales representative should be informed once framing has commenced and involved through the entire framing process to ensure that the framing has been done to the specifications provided.
- **Step 5** - The Saint - Gobain Gyproc India Limited sales representative should be informed once boarding has commenced and involved through the entire boarding process to ensure that the boarding has been done to the specifications provided.
- **Step 6** - Once the jointing and finishing has been completed, the Saint - Gobain Gyproc India Limited sales representative should be informed so that we can do a final check to ensure all design and installation procedures have been followed. Once everything has been checked and certified you will be issued a SpecSure® Warranty Certificate.

### Checks & Procedures to be followed to get best desired performance from our systems

- The gypsum plasterboards must be stored in a dry and covered place, sheltered from rain and away from damp floors. They should be tacked horizontally at least 45 cm above the ground on wooden pallets, Max height of each stock should not exceed 1 meter.
- The gypsum plasterboards systems must not be exposed directly or indirectly to exterior elements like rain, sun, snow and wind. All exterior facade work must be completed before interior boarding has begun else this will have an effect on system stability.
- Support must not be taken from AC duct, plumbing and other services as the vibrations from the same will result in cracks along the joints leading to system integrity failure.
- Once the boarding is done, jointing & finishing must be completed within 2 weeks to avoid exposure of boards to high moisture which may cause sagging of boards.
- Always follow 3 step jointing & finishing process with genuine jointing and finishing compounds and paper tape to get a smooth monolith finish.